
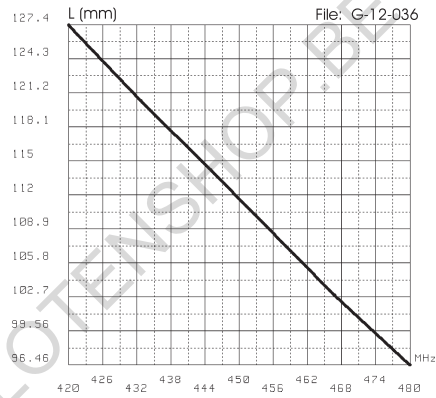
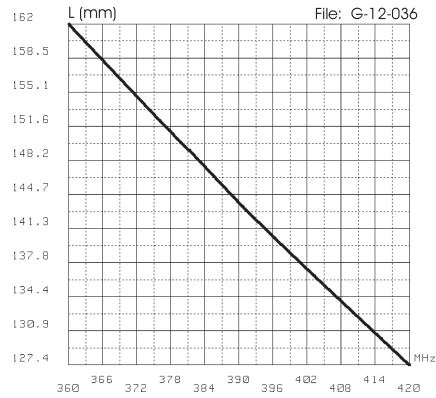
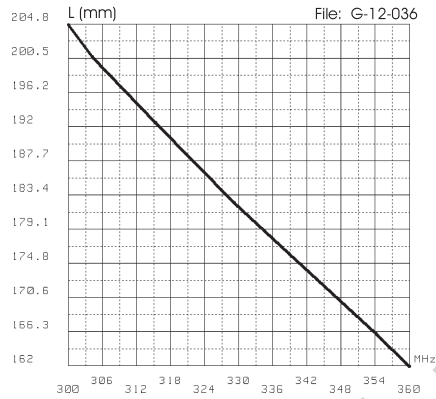
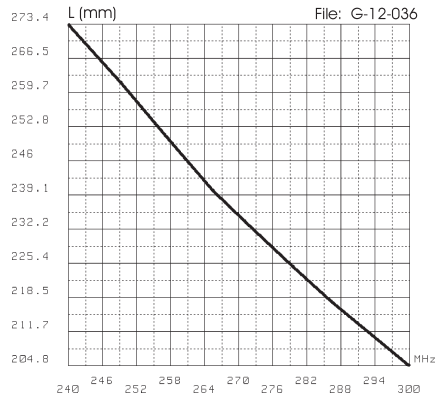
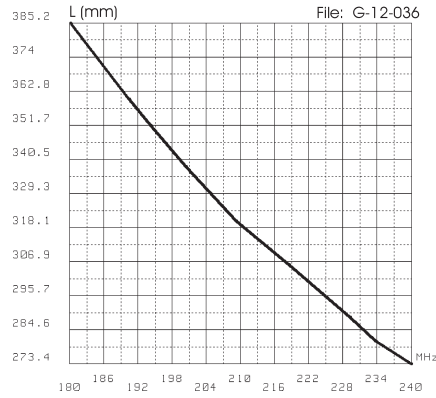


TYPICAL TUNING DIAGRAMS

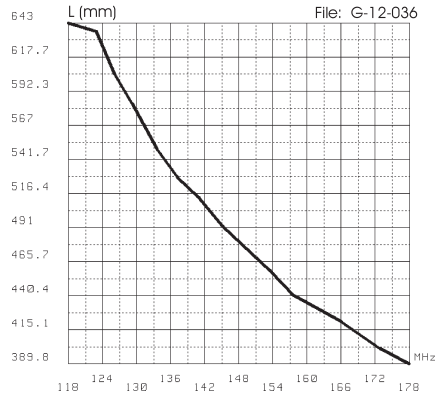

NOTE:

- L is the length indicated in the above pictures.
- It is recommended to use the curves just as a guide. Fine-tuning by using an SWR-Meter.

© Copyright SIRIO antenne - Technical Data are subjected to change - Printed in ITALY - Rev. 19/09/2005 - Cod. ID350

TAIFUN 118-480

Mobile Antenna Tunable from 118 to 480 MHz



Installation Manual

DESCRIPTION

1/4 λ vehicular antenna working on 118-480 MHz by using the attached cutting diagram. TAIFUN 118-480 is made of 17/7 PH stainless steel rod in black chrome version and supplied with 5.5 m RG 58 cable.

SPECIFICATIONS


Electrical Data

Type	: 1/4 λ Mobile Antenna
Frequency Range	: 118-480 MHz tunable by cutting
Impedance	: 50 Ω Unbalanced
Radiation	: Omnidirectional
Polarization	: Vertical
Gain	: 0 dB ref. to a $\lambda/4$ whip
S.W.R. at f. res.	: $\leq 1.5 : 1$
Max Power	: 100 Watts
Feed System / Position	: Direct / Base
Cable Length / Type	: 5.5 m / RG 58 C/U


Mechanical Data

Materials	: Black Chromed Stainless Steel 17/7 PH, Chromed Brass, Nylon
Height (approx.)	: 700 mm
Weight (approx.)	: 350 gr
Mounting Hole	: \varnothing 10 mm


MOUNTING INSTRUCTIONS

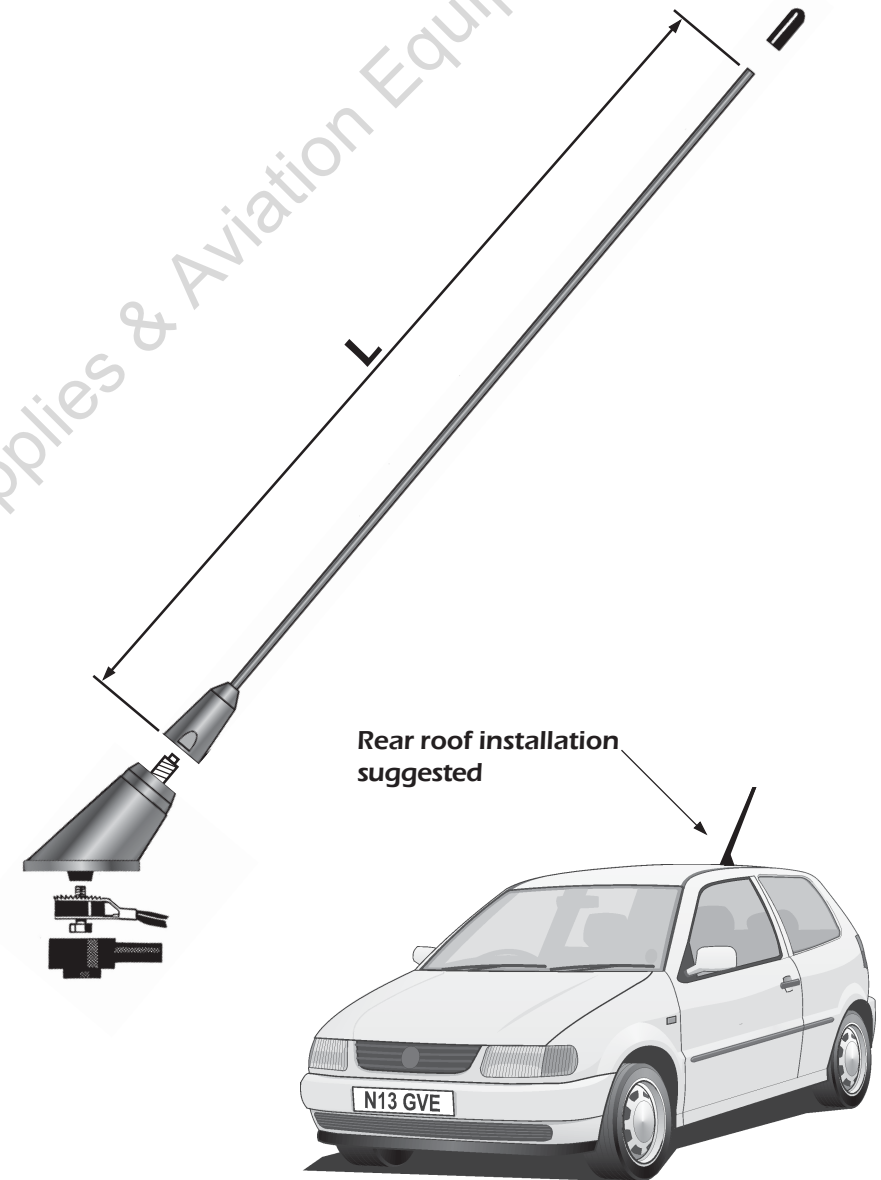

TYPICAL S.W.R. RESPONSE

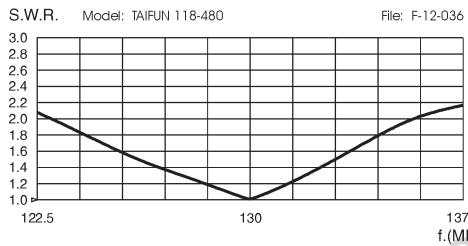

TYPICAL S.W.R. RESPONSE

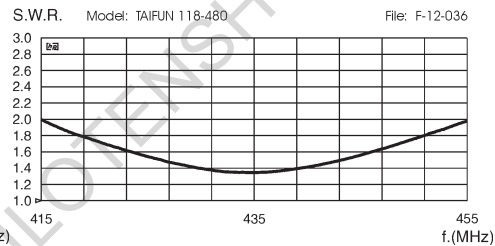

HI-QUALITY ANTENNAS MADE IN ITALY